










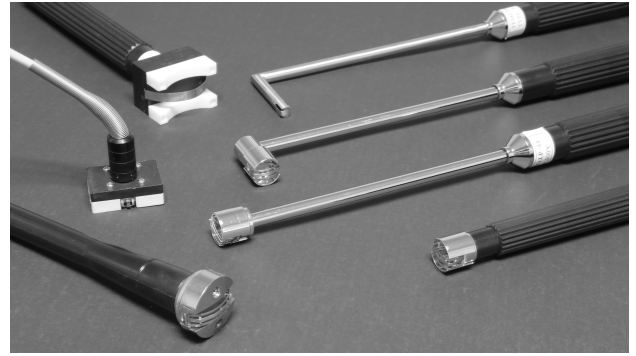











Temperature Probes LP series-4



SURFACE TYPE

<p>LP-41</p> 	 <p>ø 15 -20~+500°C</p>
<p>LP-42</p> 	 <p>ø 26 -30~+480°C</p>
<p>LP-43</p> 	 <p>ø 26 -30~+450°C</p>
<p>LP-44</p> 	 <p>ø 15 x L mm -30~+550°C</p>
<p>LP-44H</p> 	 <p>ø 15 x L mm -30~+800°C</p>
<p>LP-44TW</p> 	 <p>L mm -20~+600°C</p>
<p>LP-45</p> 	 <p>ø 15 x 26mm, L mm -30~+480°C</p>
<p>LP-46</p> 	 <p>ø 15 x 50mm, L mm -30~+480°C</p>
<p>LP-47</p> 	<p>Straight end type surface probe</p>  <p>ø 6.35 x L mm -20~+380°C</p>
<p>LP-48</p> 	<p>"L" end type surface probe</p>  <p>ø 6.35 x 50mm, L mm -20~+380°C</p>

※ L mm = 150mm For standsrd.

※ The cable length and Temperature ranges can be specified.