



## PROCESS INDICATOR

## PM5650

### Loop powered process indicator

### PM5650


- Panel mount
- 3½ Digit LED display
- Line powered
- Pre span selection
- Standard 1/8 DIN housing
- High accuracy
- 5 Year warranty



## Specifications

Display	3½ digit 7 segment high efficiency red LED 14.2 mm (0.56") height
Read Rate	3 / second
Accuracy	0.1% of selected span
Zero adjustment	-1999 to +1999 selectable by DIP switch, fine adjustment by potentiometer
Span adjustment	0 to +1999 selectable by slide switch, fine adjustment by potentiometer
Zero drift	0.01%/°C
Span drift	0.01%/°C
Decimal point	Selectable by DIP switch
Polarity	Selectable by DIP switch
Overrange	Blinking display
Voltage	230 VAC or 115 VAC (± 10%) 50 / 60 Hz
Power consumption	Approx. 3 W
Dimensions W x H x D	96 x 48 x 116 mm (1/8 DIN x 4.5")
Panel cutout W x H	90.5 x 43 mm (3.56" x 1.69")
Weight	300 g (10.5 oz.)
Operating temperature	0...60°C
Storage temperature	-20...85°C
Relative humidity	95% RH @ 40°C; non-condensing

## Dimensions

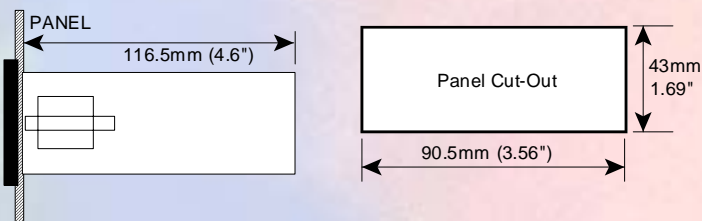

## Order information and options

**Specify model:**  
PM5650

**Example:**  
Model PM5650-AA

### Options:

- AA = 230 VAC; input 0 – 20 mA
- BB = 115 VAC; input 0 – 20 mA
- CC = 230 VAC; input 4 – 20 mA
- DD = 115 VAC; input 4 – 20 mA
- GG = IP65 (NEMA-4X) Waterproof enclosure, front 134 x 138 mm, suitable for panel mounting.

