

For non-traditional, extreme applications

*Designed to adapt to your requirements;
customize yours today*



**Epoxy-filled,
powder-coated housing**

Stands up to arctic frost, sandstorms
or moisture condensation



Customer-specified elastomers

Whether it's ammonia, beer, shop air or sour gas;
Gems can outfit your valve with the elastomer you need




Stainless steel or brass construction

Optimize for corrosion resistance
or cost with brass, 303SS & 316SS
standard options

Limitless body configurations

Select manifold mount, 1/8" & 1/4" NPT standard catalog
configurations, or we can help to realize your own

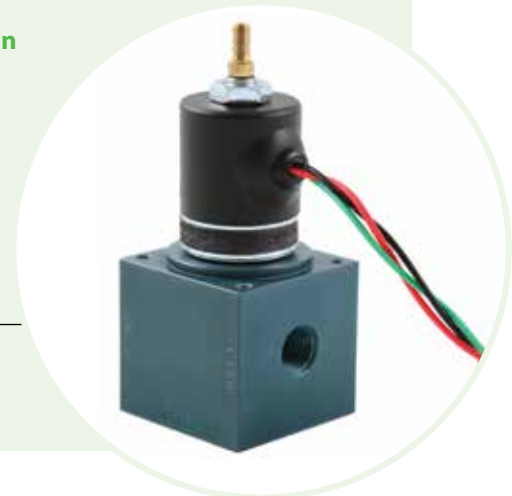

Why is a Gems Latching Valve Right for Your Unique Application?



Plunger Lift

- Field-proven construction
- Optional CSA compliant diode pack



Gas Analyzers, Monitors & Detectors

- Wetted materials that won't outgas
- Zero volumetric change of gas as it passes through

MAGNETICALLY LATCHING SOLENOID VALVE



Pressure Decay Testers

- Bubble Tight
- Zero volumetric change of gas as it passes through



Portable Test Equipment

- Maximize your battery life
- Withstand any drop test



Beer Dispensing

- NSF Compliant construction
- Zero coil heat keeps the beer cold
- Orifice sizes match your beer line to minimize foaming

Magnetically Latching Solenoid Valve Competitive Advantages

- ✓ **Industry-leading cold temperature operation** – Unlatch at temperatures below -40°C
- ✓ **Superior media compatibility** – Multiple seals and body materials available
- ✓ **Withstands the elements** – Epoxy-filled, powder-coated housing keeps mother nature away from the electrical
- ✓ **Flexible design** – Vertically-integrated machining, coil winding, assembly & testing ensures you can spec what you need
- ✓ **Certification-ready with optional:**
 - Class 1 divs 1 & 2 compliant diode pack
 - NSF & FDA compliant materials
 - Cleaning for oxygen service

Magnetically Latching Solenoid Valve Standard Options

- ✓ **Power Requirements**
 - 6, 12 & 24 VDC
 - Positive or negative pulsing
 - With or without diode packs
- ✓ **Body Materials**
 - Brass
 - 303 Stainless Steel
 - 316 Stainless Steel
- ✓ **Seal Materials**
 - Viton
 - Nitrile (Buna-N)
 - Hydrin
 - Perfluorelastomer
- ✓ **Port Fittings**
 - 1/8" Female NPT
 - 1/4" Female NPT
 - 5/16" Center Stud Manifold Mount
 - Without body (mounts directly into your manifold)

Visit GemsSensors.com to view our full range of solenoid valves or to inquire on custom solutions.



D Series
High Flow Solenoid Valves



M Series
Miniature Solenoid Valves



Custom Solutions



OUR EXPERIENCE • YOUR SOLUTION

Global Corporate Headquarters

Toll-Free: +1-855-877-9666 Outside the US: +1-860-747-3000

www.gemssensors.com